

# RelyUm<sup>®</sup> Industrial



Time-Sensitive Networking  
Endpoint Bridge PCIe NIC

## RELY-TSN-PCIe

# Overview

Time-Sensitive Networking (TSN) allows to combine critical and best effort traffic in a unique deterministic and interoperable Ethernet network. This offers significant cost reductions in terms of equipment investment, maintenance, seamless integration and single vendor dependence reduction.

Introducing RELY-TSN-PCle, a groundbreaking TSN endpoint bridge PCle NIC that is simplifying deterministic Ethernet networks with ease. With 2 multimedia Gigabit Ethernet ports and 2 internal ports, this device functions as


both a PCle TSN Endpoint and a TSN Bridge, making it easy to integrate TSN technology into any system.

RELY-TSN-PCle leverages Xilinx UltraScale™ FPGA technology, which offers specialized networking, synchronization, and security services. Its FPGA-based design ensures adaptability to evolving TSN standards. This platform is supported by a robust ecosystem and expertise from SOC-E, ensuring a seamless retrofitting process from start to finish.

## Key Features

- **COTS systems retrofitting** to add advanced TSN features, to support deterministic communications.
- FPGA-based solution, powered by **SOC-E's in-house designed** technology, to be **easily upgraded** as TSN standards evolves.
- **"Zero-Packet Loss" redundancy** using TSN FRER for selected traffic combined with MSTP.
- Simplified management and monitoring via a user-friendly HTTPS web interface or SSH accessible CLI. **Compliant with Qcc for centralized configuration through YANG model configuration files.**
- Comprehensive **TSN Ecosystem** offering combined **with SOC-E's TSN Expertise**, to deploy a turnkey project.
- Ethernet **network drivers available for most OS** (Linux, Windows and other RTOS).

## Dimensions

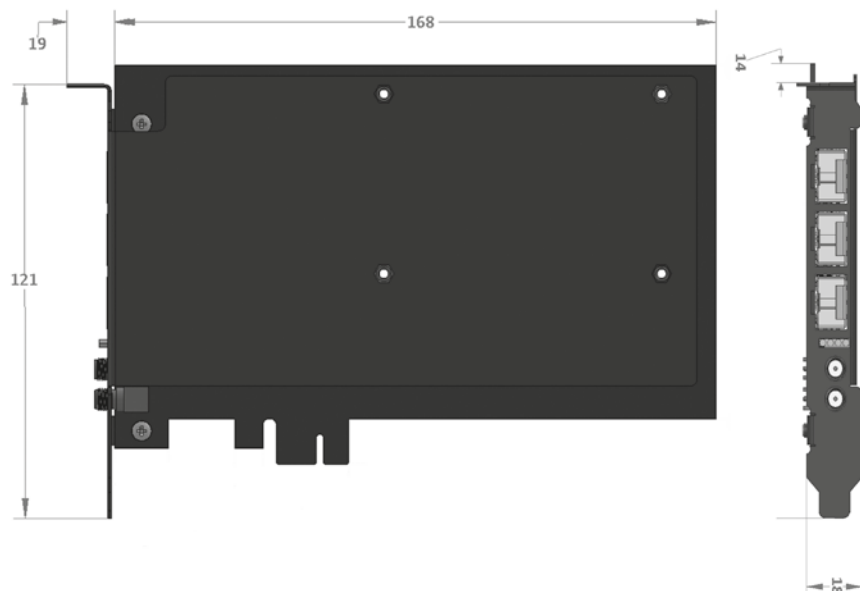

# Technical Specifications

## Communication Interfaces

- 2x 100/1000BASE-SFP TSN Ethernet ports
- 1x 1G PCIe port for attachment to a host computer

## Layer 2 Features

- IEEE 802.3-2008 (Ethernet)
- Automatic MAC address learning and aging
- Static MAC Table
- Port-Based Virtual LANs (VLANs):
  - Logical segmentation of network for optimal use of bandwidth
  - IEEE 802.1Q for VLAN tagging (up to 4K VLAN groups)
  - IEEE 802.1p for Class of Service (CoS) / Quality of Service (QoS)
- IEEE 802.1AB for Link Layer Discovery Protocol (LLDP)
- Port rate limiting
- Storm control for flooded broadcast, multicast and unicast
- Layer 2 multicast filtering
- IGMP Snooping (up to 1024 multicast filters)
- Spanning Tree Protocol:
  - IEEE 802.1D (STP)
  - IEEE 802.1w (RSTP)
  - IEEE 802.1s (MSTP)

## TSN Features

- IEEE 802.1AS - Timing and Synchronization
- IEEE 802.1Qav - Credit Based Shaper (CBS)
- IEEE 802.1Qbv - Time Aware Shaper (TAS)
- IEEE 802.1Qci - Per-Stream Filtering and Policing
- IEEE 802.1CB - Frame Replication and Elimination for Reliability (FRER)
- IEEE 802.1Qcc - Stream Reservation Protocol (SRP) Enhancements and Performance Improvements

## Security

- IEEE 802.1X for port-based network access control
- MAC port binding & authentication for login security
- RADIUS authentication
- RBAC (Role Based Access Control)
- Selective ports disabling capability
- Unsecure protocols disabling capability
- HTTPS for web interface
- Secure Shell (SSH) Protocol v2 for command line interface
- Encryption/authentication & signature for firmware and bitstream

## Configuration & Management

- HTTPS web interface
- SSHv2 command line interface (CLI)
- Netconf protocol (YANG model-based configuration) support
- Encrypted and digitally signed firmware/bitstream upgrades
- Saving and restoring configuration
- Internal status monitoring and logging
- Event notification through Syslog
- Statistics independent per port
- In-band management via any Ethernet switch port

## Processing

- Xilinx Ultrascale+ MPSoC device:
  - 2x 64bit CPU ARM-Cortex-A53
  - 2x 32bit CPU ARM-Cortex-R5F
  - 1x 16nm UltraScale+ FPGA
- 2GB DDR4 RAM memory
- 16GB eMMC Flash memory
- 256Mb QSPI Flash memory

Physical & Electrical Characteristics

- Fanless design
  - Dimensions (mm):  
121(W) | 168(D) | 18(H)
  - Weight: 255g
  - Power Input as defined in PCI-express standard:
- +12VDC
  - +3.3VDC
  - Operating temperature: -40°C to +55°C
  - Storage temperature: -40°C to +85°C
  - Full-Height PCIe card mounting

Warranty

- 2 years


Certifications

- UNE-EN 61326-1:2013
- UNE-EN 61326-2-1:2013

Ordering Code

| Ordering code     | Model and description                                                                        |
|-------------------|----------------------------------------------------------------------------------------------|
| TSN26.17          | RELY-TSN-PCIe: Time-Sensitive Networking Endpoint Bridge PCIe NIC                            |
| Accessories       |                                                                                              |
| A-SFP-CU-02.01    | COPPER SFP (10/100/1000): Copper tri-speed RJ45 SFP Module                                   |
| A-SFP-FO-MM-01.01 | FIBRE SFP (100) – 1310/MM/LC: Multimode Fibre Optic LC Connector 1310nm 100Mbps SFP Module   |
| A-SFP-FO-SM-01.01 | FIBRE SFP (100) – 1310/SM/LC: Singlemode Fibre Optic LC Connector 1310nm 100Mbps SFP Module  |
| A-SFP-FO-MM-02.01 | FIBRE SFP (1000) – 850/MM/LC: Multimode Fibre Optic LC Connector 850nm 1000Mbps SFP Module   |
| A-SFP-FO-MM-02.02 | FIBRE SFP (1000) – 1310/MM/LC: Multimode Fibre Optic LC Connector 1310nm 1000Mbps SFP Module |

To know more about other available references, please contact your sales representative.

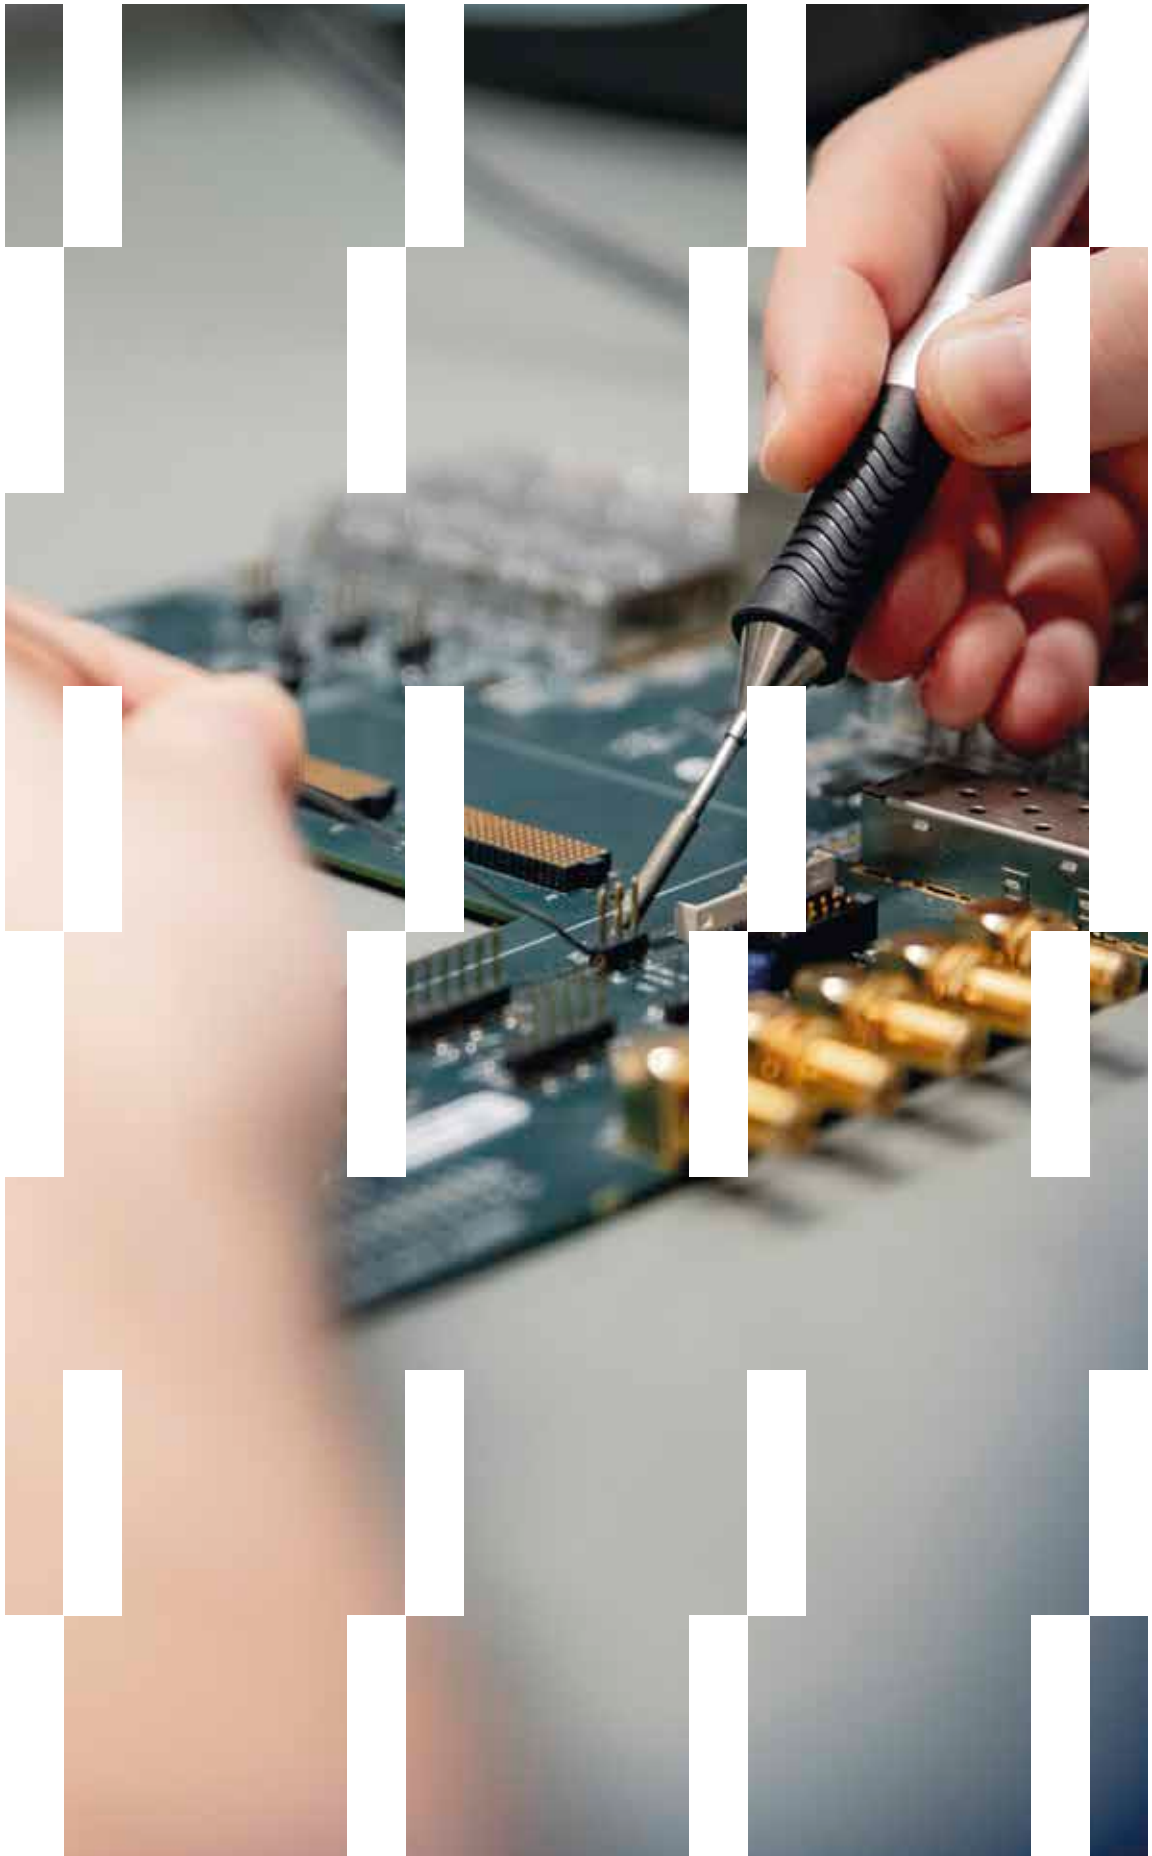

# RelyUm<sup>®</sup> By

RELY-TSN-PCIe

Time-Sensitive Networking  
Endpoint Bridge PCIe NIC

# soc<sup>®</sup>e

[www.soc-e.com](http://www.soc-e.com)  
[info@soc-e.com](mailto:info@soc-e.com)

Calle Islas Canarias 19, piso -1  
48015 Bilbao (Spain)